

» commercial

COMMERCIAL FLOORING

FOR RETAIL, OFFICES, EDUCATION, EVENTS & MORE









MORE FROM YOUR FLOOR











2

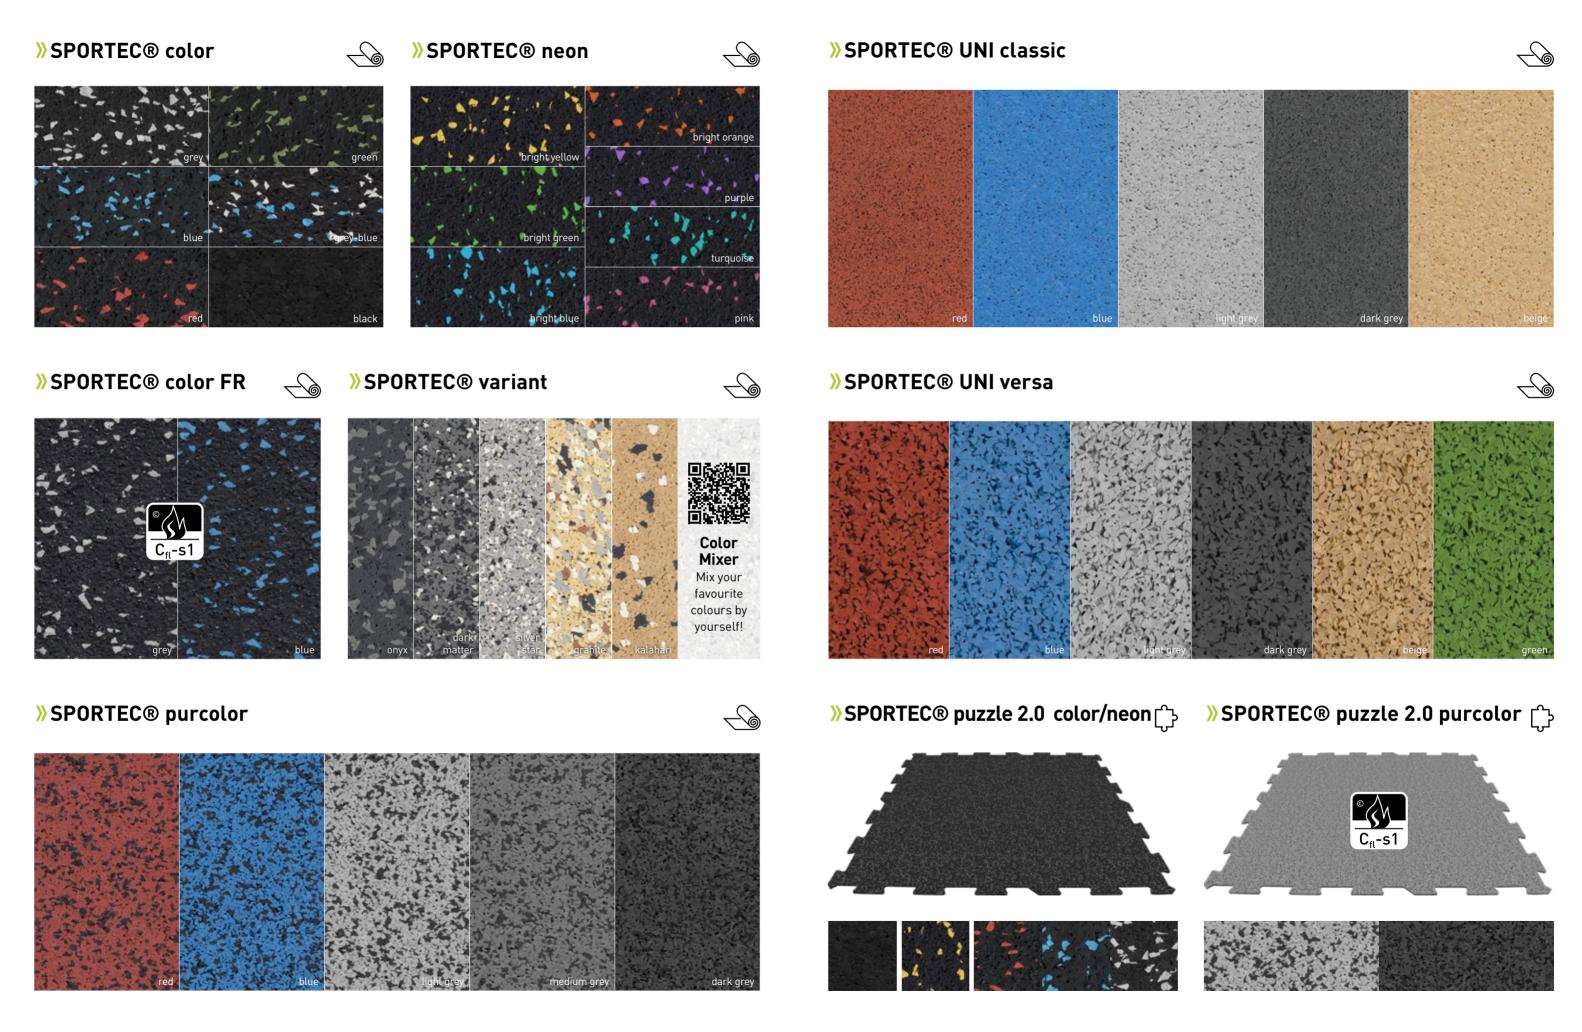

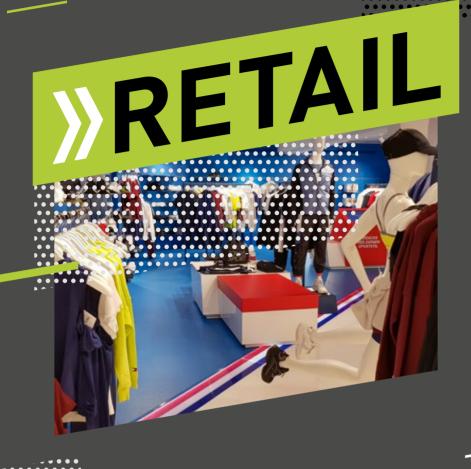



Shopping experiences made to fit.

Our SPORTEC® floor coverings are perfect for highly frequented shops due to their combination of comfort and robustness, slip resistance and fire protection. Extraordinary shopping experiences can be created thanks to the wide range of designs and colour combination options. With SPORTEC® variant, for example, you can create your own colour mix adapted to your corporate design colours, which makes a significant contribution to conveying your brand message to the customer. For temporary pop-up stores, SPORTEC® floor coverings can also be bonded with double-sided industrial adhesive tape so that the floor can be reused later - all in the spirit of sustainability.






SPORTEC® reference projects for retail







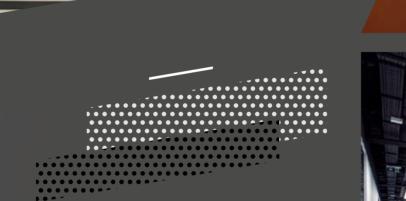


NOISE REDUCTION. INNOVATIVE. FIRE-RESISTANT.


Modern design meets improved working atmosphere.

Our SPORTEC® floor coverings also cut a fine figure in offices. In particular, the excellent impact sound insulation reduces the noise level in corridors and offices and promotes a healthier working environment. A variety of modern designs combined with its elasticity stimulate creativity and ensure a greater sense of well-being and comfort at work. High fire protection and slip resistance classes round off the requirements profile.



SPORTEC® reference projects for offices

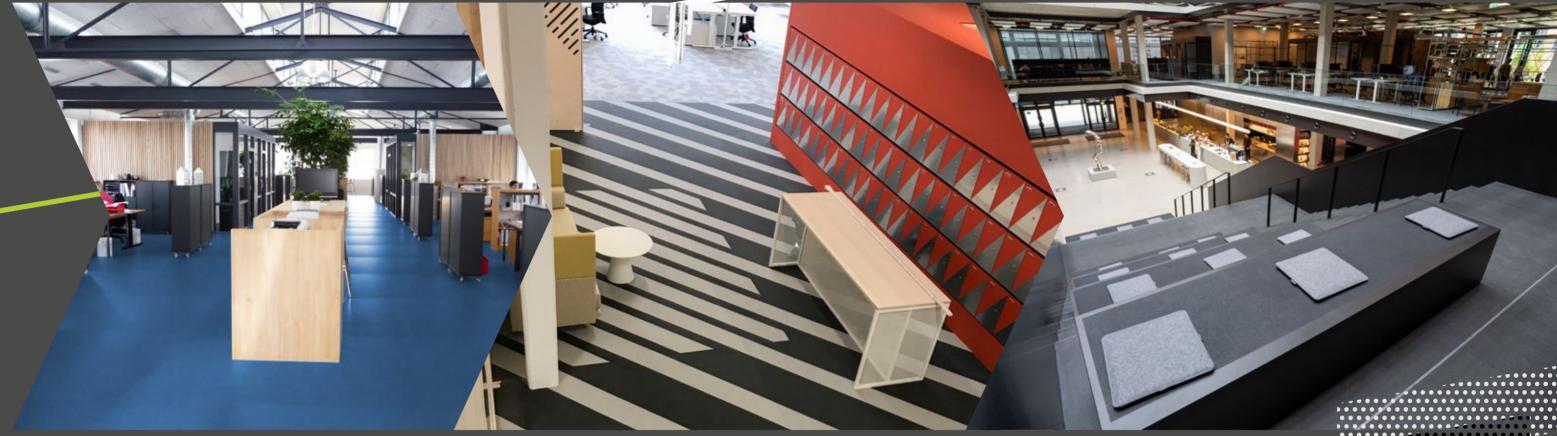

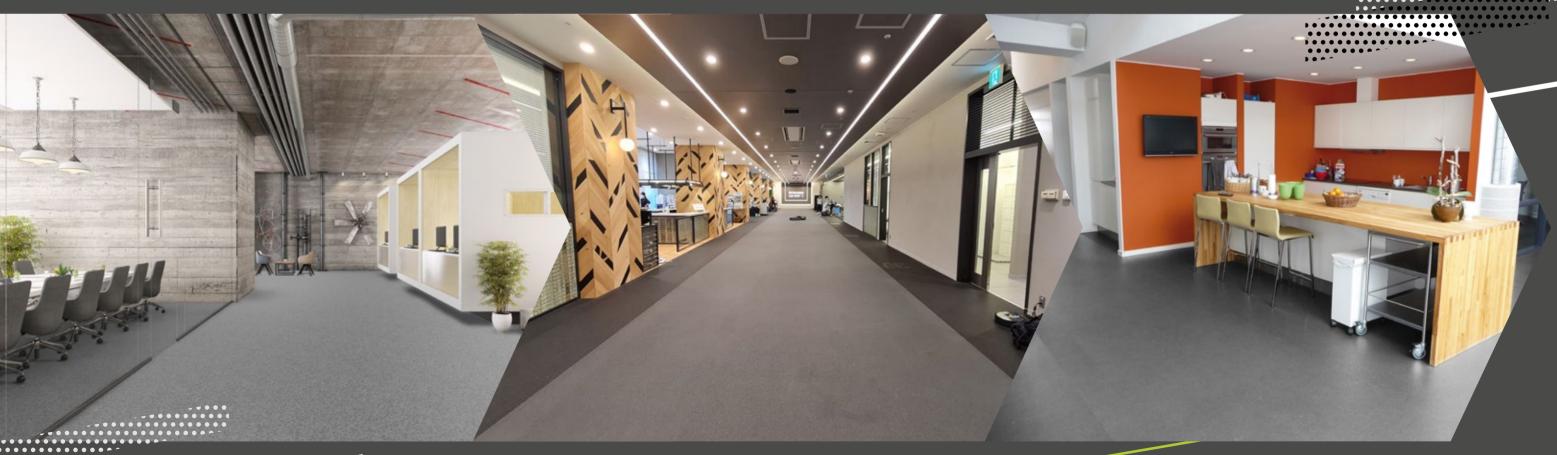



LOW NOISE. SLIP RESISTANT. COLOURFUL DESIGN OPTIONS.

Schools. Kindergardens. Museums.

A floor that reduces impact sound and is slip-resistant is the primary importance for schools, kindergartens or even museums to ensure peace and quiet and prevent injuries. Walkways or play areas can be created by using different shapes or motifs with colourful designs, bringing life and animation to your learning and recreation areas.













Exhibitions & Events.

Only SPORTEC® floor coverings make exhibition stands a real highlight. On the one hand, modern designs or custom colour mixes for exhibition stands can be realised to match the corporate design. On the other hand, the elasticity and pleasant walking sensation gives stand visitors a positive "wow effect" when they step on the floor for the first time.






18






For the fastest possible recovery.

Whether you need a floor covering for the entrance area, for corridors or for treatment rooms, SPORTEC® offers suitable solutions for all areas in rehabilitation centres. The floors' elasticity is particularly important, giving ergonomic comfort that provides a pleasant walking feeling, whilst high slip resistance enables people with limited motor abilities to walk safely and reduce stress on their joints.

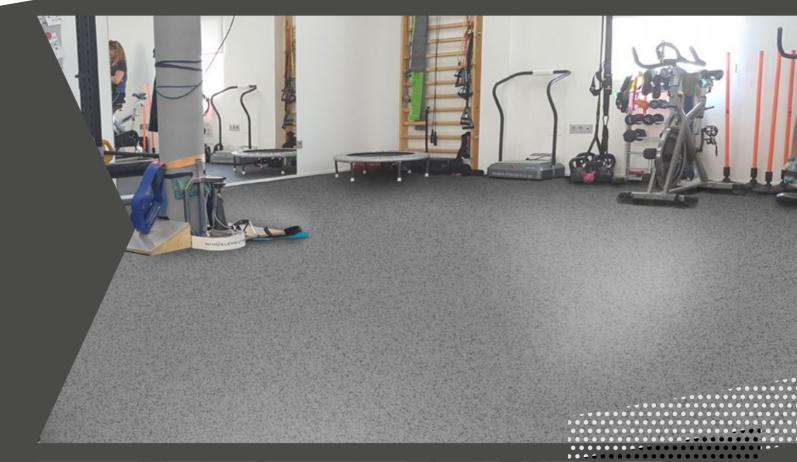

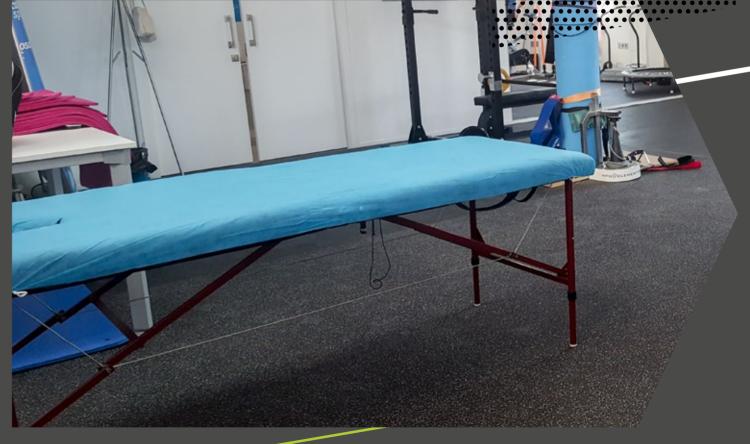

INSTALLATION »ACCESSORIES

GLUEING. SEALING. CLEANING. LINE PAINT.


SPORTEC® varnish. cleaner. adhesive. line paint.

We provide the necessary installation accessories for our SPORTEC® floor coverings. The varnish protects the floor and enables easier cleaning. With our cleaner you can remove even the most stubborn dirt from the floor. Our PU glue provides the strength and elasticity to make sure our floors are permanently fixed to the sub-base. You can use the line colour to fully customise the design and look of your floor.

>> SPORTEC® Varnish RZ TURBO PROTECT ZERO




Packsize	4.5 l + 495 ml hardener
Pot life	120 Min. (20 °C / 60 % relat. LF)
Set to foot traffic	after approx. overnight drying
Final strength	after approx. 7 days
Consumption amount	100 ml/m²
based on a room temperature of 20 °C	



>> SPORTEC® Cleaner RZ INTENSIVE CLEANER



Packsize	750 ml or 5 l
Working temperature	18 - 25 °C
Area	10 l: 250 m²
Consumption	40 ml/m²



» Adhesive SPORTEC® UN 700



Packaging	Set of 25 or 28 kg (mixing ratio Base : Cu- ring Agent = 850 : 150)
Pot life	approx. 30-60 minutes
Can be walked on	after approx. 8 hours
Final strength	after approx. 36 hours
Consumption amount	700 g/m²

based on a room temperature of 20 °C



» Line Marking Paint




Colours	white, blue, black, dark blue, orange, yellow, red, grey, green
Packaging	1kg per set
Consumption	approx. 20 g/m²
Recoatable	after 16 hours and max. within 48 hours at 20 °C and 50% RH
Fully cured	after approx. 7 days



Technical Data

SPORTEC® color



Material

Dimensions

fine-grain recycled rubber tyre granules (black) with 0 or 15 % EPDM colour granules, PU-elastomer bonded

Roll length

Length m/Thickness mm: 30/4, 20/6, 15/8, 12/10

Roll width: 1.500 mm

Thicknesses

4, 6, 8, 10 mm (other thicknesses available on request)

SPORTEC® color FR



Material

fine-grain recycled rubber tyre granules (black) with 15% EPDM colour granules, PU-elastomer bonded. Flame-retardant equipment

Dimensions

Roll width: 1,500 mm Roll length Length m/Thickness mm:

30/4, 20/6, 15/8, 12/10

Thicknesses

4, 6, 8, 10 mm (other thicknesses available on request)

More technical data:

Material

Dimensions

Thicknesses

visit www.kraiburg-relastec.com/sportec/en

SPORTEC® neon



Material

fine-grain recycled rubber tyre granules (black) with EPDM colour granules, PU-elastomer bonded

Dimensions

Roll width: 1,500 mm Roll length

Length m/Thickness mm:


30/4, 20/6, 15/8

request)

Thicknesses

4, 6, 8 mm (other thicknesses available on





Material

100 % EPDM granules PU-elastomer bonded

Dimensions

Roll width: 1,250 mm Roll length


Length m/Thickness mm:

30/4, 20/6, 15/8

Thicknesses

4, 6, 8 mm (other thicknesses available on request)

SPORTEC® variant



Material

EPDM colour combinations, PU-elastomer bonded

Dimensions

Roll width: 1,250 mm

Roll length

Length m/Thickness mm:

30/4. 20/6

Thicknesses

4 or 6 mm (other thicknesses available on request)

SPORTEC® UNI classic



fine-grain EPDM granules, PU-elastomer Material bonded Roll width: 1,250 mm Dimensions Roll length: 15 m Thicknesses 4 mm (other thicknesses available on request)

EPDM colour range white RAL 9010 eggshell RAL 1015 beige RAL 1014 yellow RAL 1002

SPORTEC® UNI versa

Roll width: 1,250 mm

available on request)

Material

Dimensions

Thicknesses

green RAL 6021

lilac RAL 4005

Coarse-grained coloured EPDM granules


4 mm (other thicknesses available on request)

bonded with polyurethane elastomer

Roll length: 4 mm (other roll lengths








dark grey RAL 7011

bright orange RAL 2008







medium grey RAL 7037

bright red RAL 3017

hlue RAI 5015

brown RAL 8025



black RAL 9004 light grey RAL 7038

SPORTEC® puzzle 2.0 color/neon/purcolor

SPORTEC® color, neon or purcolor

Covering dimensions: 1,000 x 1,000 mm

1,030 mm / 1,030 mm


bright yellow RAL 1012

bright blue RAL 5012

6, 8, 10 mm



Other SPORTEC® brochures



pink RAL 4003









25


dark green RAL 6005

turquoise RAL 5018

beige-brown RAL 8024

Shooting Winter sports

24

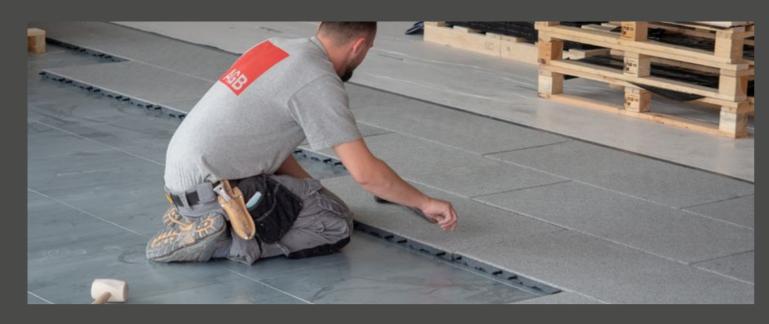



General installation instructions


Required tools

gloves, measuring tape, cutter, chalk line, jigsaw and rubber hammer for tiles, pressure roller for rolls



Acclimatisation

The floor covering should be unstacked from the pallet before laying and stored 1-2 days where it will be laid.

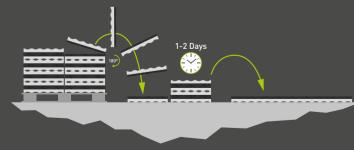

Adhesive (700 g/m²), varnish (100 ml/m²), cleaner (40 ml/m²)

Please add the required quantity to your order.


Detailed installation instructions for each product www.kraiburg-relastec.com/sportec/en/downloads

Installation videos on YouTube




Installation of rolls

SPORTEC® rolls should always be aligned in the same direction towards the brightest part of the room.

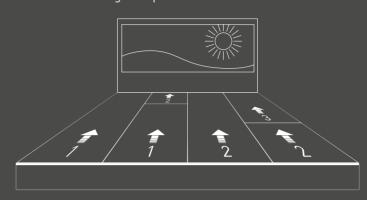

SPORTEC® rolls should be laid with pressure on the butted joints (close to overlapping). No welding or joint filler is required.

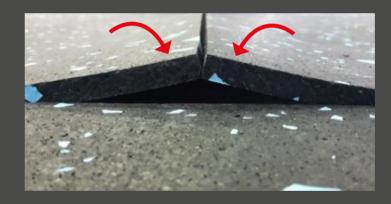

SPORTEC® rolls should be completely glued to the floor. Thicker rolls (from 10 mm thickness) can be fixed with industrial double-sided adhesive tape.




SPORTEC® website - tools




www.kraiburg-relastec.com/sportec/en/room-designer

Plan your room with the colour of your choice! Select the photo that best suits your application and change the colours of the SPORTEC® product in the picture.

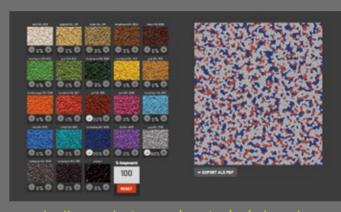

ww.kraiburg-relastec.com/sportec/en/color-mixer

Create your own SPORTEC® variant floor covering. Choose up to 5 different colours from our EPDM colour palette and adapt the design to your wishes.

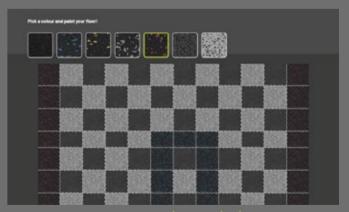

vww.kraiburg-relastec.com/sportec/en/puzzle-2-0-designe

Lay out your room with puzzle mats and plan the colours exactly with our SPORTEC® puzzle Designer! Choose from 3 different presets (plain surface, chequered pattern, stripes) and adjust your surface exactly according to your wishes. Export the surface as PDF and start a non-binding price inquiry.

Relastec.de 5G

100%



SPORTEC® Support Chat

SPORTEC® Team, You

Why should I use rubber floors in my shop, office or school? 🛵

Rubber floors stand out from other floor coverings. Not only are they elastic, soft and very robust, they are also non-slip, ergonomic and help reduce noise. They are perfect for work premises and are environmentally friendly.





How thick does the rubber floor have to be?

For classic use as a floor covering 4mm is sufficient, with 6 and 8mm also available for extra comfort or high frequency use.

Our SPORTEC® fusion classic (8mm) is ideal for decorative tracks.

Do I need to varnish the floor?

Since the area is likely to be highly frequented, using a varnish makes absolute sense, making cleaning alot easier. The only exception would be if the floor were to be subject to high punctual loads such as high heels or heavy trolleys.



Can I repair a damaged varnished area?

Small damaged areas can be repaired with the RZ Refresher Set. For larger areas you have to remove the old varnish and then reseal.



The building is only rented but I want to have a short-term SALE presentation area, do I have to glue the rubber floor?

For temporary applications you can either use SPORTEC® Puzzle 2.0, or you should fix roll materials to the floor with double-sided tape.

I have floor heating. Can I install a rubber floor on it?


You can use our roll materials such as SPORTEC® color or purcolor, up to a total thickness of 20mm thickness, on underfloor heating.

Is it true that rubber smells?

Like any other flooring, rubber has a typical odour. We neutralise this as much as possible in our production process and after installation it will reduce over time, but of course it helps if the rooms are well ventilated.

Which glue should I use?

All SPORTEC® products should be bonded with a 2-component PU adhesive. This is very resistant, especially for outdoor use.



What about fire protection? 🎸

Our floorings have different fire classes from $E_{\rm fl}$ to $C_{\rm fl}$ -s1. For all tenders we have a fitting solution.



How long does the floor last? (1)

Typically 8-10 years under normal use.

What do I do with the floor when I want to change it after a few years?

You do not have to tear it out. Leave it simply as an acoustic underlay for the new floor, whether it be tiles, parquet, laminate or even SPORTEC®!

The extra advantage of SPORTEC® Puzzle mats is that they can easily be exchanged.

Who is my contact person? 🔯 🕏

On our homepage you will find the right contact person for your region.

www.kraiburg-relastec.com/sportec/en/contact-persons



SUSTAINABILITY

Corporate Carbon Footprint, Product Carbon Footprint, Energy Management, Social and economic sustainability at KRAIBURG Relastec



CORPORATE CULTURE

Defined values, social norms and guidelines, for common action and cooperation inside and outside KRAIBURG Relastec.

Strong decision-making powers

We ensure speed in process handling, faster



Recycling of up to 60,000 t material

Every year, we process and recycle up to 60,000 tons of old tyres, closed-cell rubber and rubber production scrap.



Reduction of CO₂ emissions

By using recycled rubber granulate, we save more than 130,000 tonnes of CO₂ emissions per year compared to virgin rubber.



Corporate **Carbon Footprint**

The CCF was developed in accordance with the Greenhouse Gas Protocol audited.



Equal opportunities

We stand for equal opportunity, diversity, inclusion and religious diversity.



Social responsibility

Fair pay, collective bargaining, further training, career development, work-life integration.



Respect

We are honest, reliable, respectful and trustworthy towards our colleagues and partners.



Responsible for our actions

We take responsibility for all decisions and results. Error acceptance is firmly anchored in our culture.

technology optimisations and lean processes.



Transparency

WHAT SETS US APART

Internationality

We practice open, transparent cooperation both inside and outside the company.

With an export quota of over 50%, we have alrea-

dy exported our products to over 100 countries.

Transparent and optimised processes ensure



Product Carbon Footprint

The PCF is calculated in accordance with ISO 14067 and ISO 14040/44 audited.



Energy management according to ISO 50001

Our energy management system is identified according to ISO 50001. Energy-relevant topics are taken into account in all processes of the organisation.



Voluntary rating

The ecovadis rating is an evaluation of companies with regard to CSR topics. This includes ethical aspects, sustainable procurement, the environment and ecological sustainability.



Personal contact persons

We do not hide behind support hotlines and contact forms. With us, you have personal, competent contact persons.



Product quality

Our products meet the highest quality standards. They are durable, a perfect fit and made from high-quality raw materials.



We continuously develop new products according to the requirements of our



rapid processing.

Easy complaint management

Flexibility with customer requirements We offer our partners customised options for packaging, labelling and delivery, packaging, labelling and delivery.



Long-term relationships

We maintain long-term relationships with our customers and suppliers based on mutual respect and fairness.



Marketing support

We provide you with the best possible support in the form of images or in the design of your documents.



Member of NEW LIFE initiative

The declared aim of NEW LIFE is to demonstrate the advantages of recycled products from End-of-Life Tires (ELT) to the media, politicians and the general public and to motivate them to act sustainably. More information: www.initiative-new-life.de/en



Social sustainability

Acting in accordance with our values such as equal opportunities, social responsibility, respectful treatment and transparency are the foundations for social sustainability in practice.



Economic sustainability

As a family business, KRAIBURG Holding pursues a long-term strategy. Profits generated are used to a significant extent to make our holistic business model ever more efficient and future-proof.



Innovation and product design

customers and the market.

MORE FROM YOUR FLOOR



Sports flooring and elastic layers

made from rubber granules

KRAIBURG Relastec GmbH & Co.KG Fuchsberger Straße 4 · D-29410 Salzwedel

Sales International:

Tel. +49 (0) 8683 701 -340

Fax +49 (0) 8683 701 -4340

sportec@kraiburg-relastec.com

www.sportec-flooring.com

No liability accepted for errors or omissions. Subject to changes without prior notice. © KRAIBURG Relastec GmbH & Co. KG 2025















Download this brochure in other languages:



