


»wintersport

FLOORING FOR WINTER SPORTS FACILITIES

SKI LIFTS, ICE RINKS, RESORTS, RETAIL, SKI DEPOTS

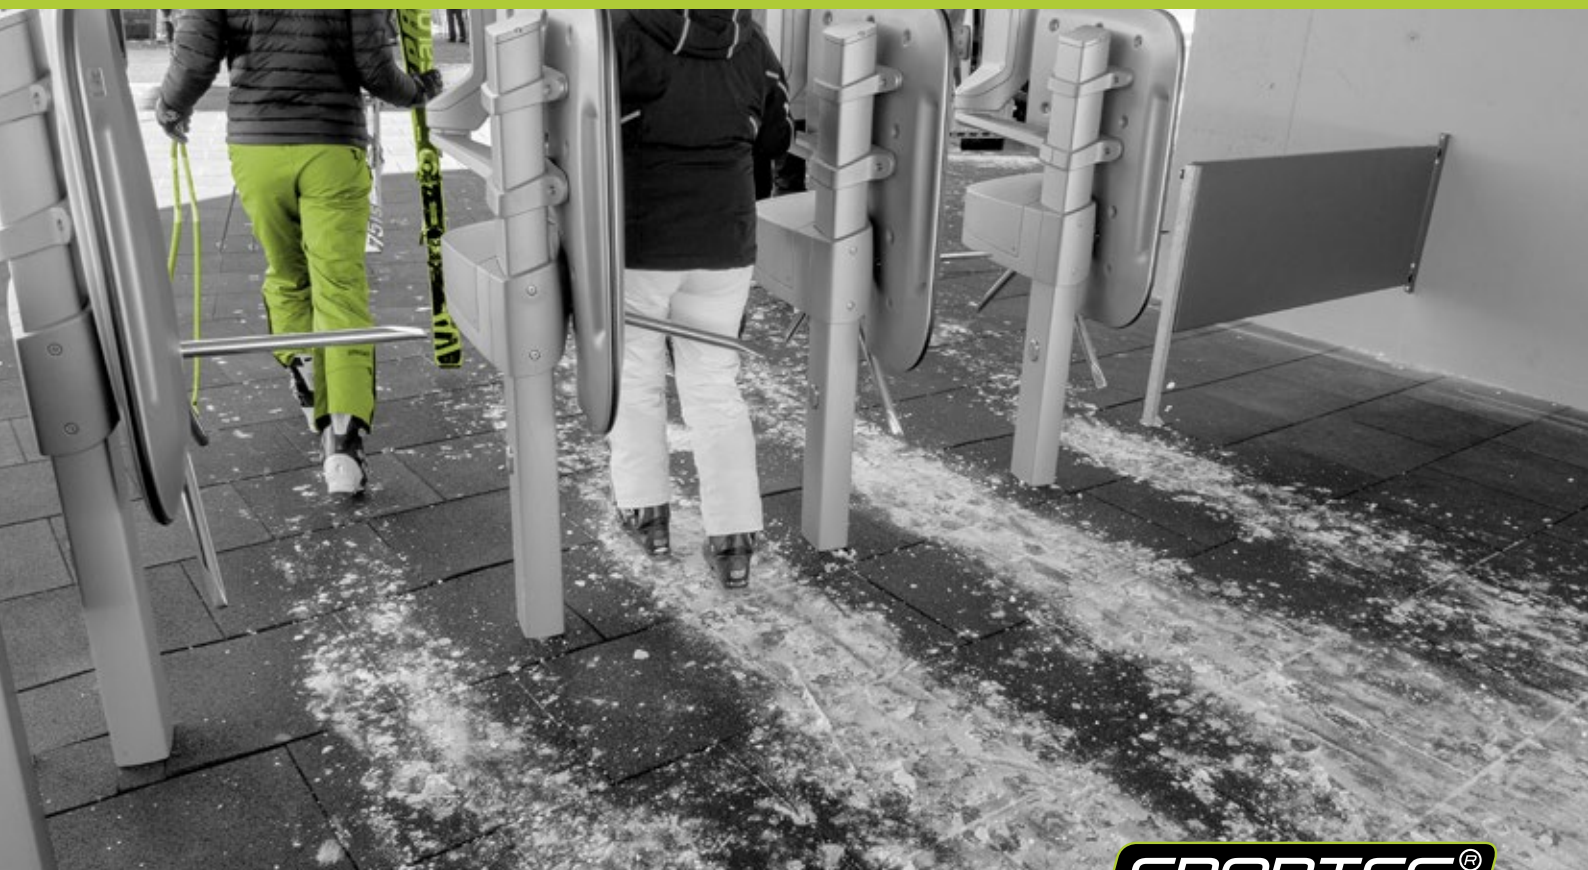

SPORTEC®



»SKI LIFTS
PAGE 6-9



»RESORTS
PAGE 10-11



»ICE RINKS
PAGE 12-15



»RETAIL
PAGE 16-17



»SKI DEPOTS
PAGE 18-19



»ACCESSORIES
PAGE 20-21

»MORE FROM YOUR FLOOR

CONVINCING ADVANTAGES.



Slip resistance

To guarantee the safety of skiers, ice skaters and spectators, SPORTEC® floor coverings offer R10 slip resistance (tested according to DIN 51130).



Protection of ski boots/blades

The 10 mm thick elastic floor covering or 30 mm tile material prevents damage - both to the equipment and the surface.



Ergonomic

The elasticity of the rubber surface enables pleasant walking that is easy on the joints.



Resistance

Our floors are insensitive to any kind of weather influences. They withstand the stresses of ski boots, skis and snowboards for a long time. Tiles are so robust they can also be laid directly on metal grating.



Impact sound reduction


Especially in highly frequented buildings and areas, this increases the feel-good factor (approx. 20 dB impact sound reduction with 10 mm thickness).




High fire protection classes

SPORTEC® EPDM floor coverings offer C_{fl}-s1 fire rating.


»SPORTEC® mountain

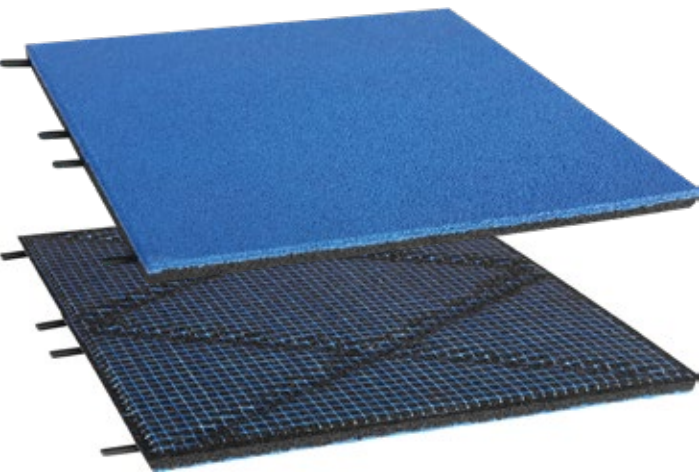


»SPORTEC® purcolor

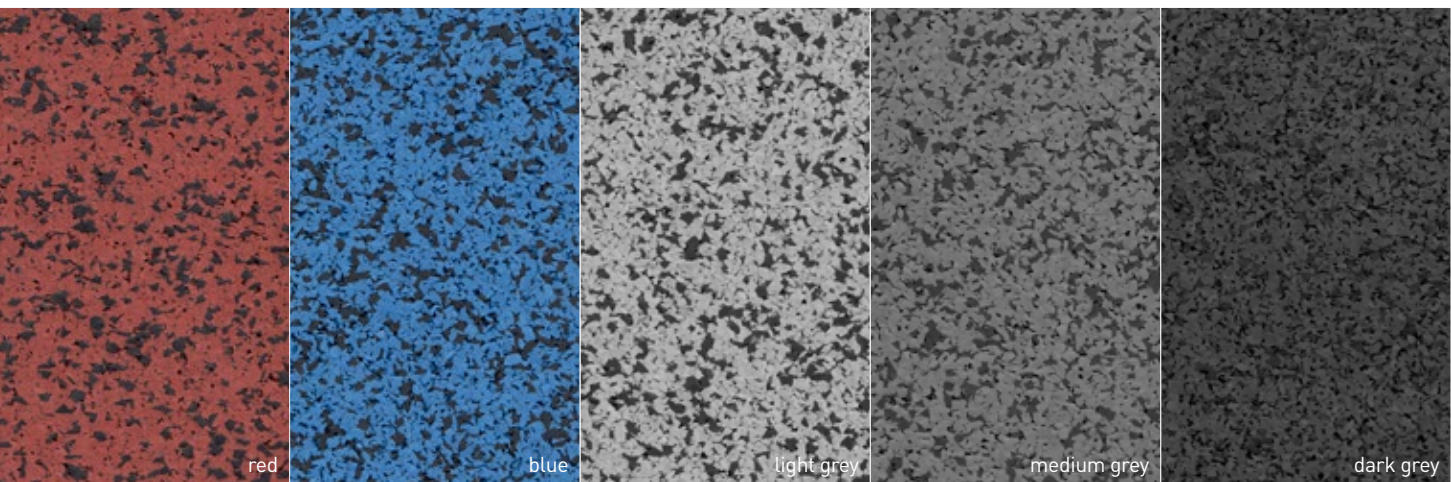


»SPORTEC® color

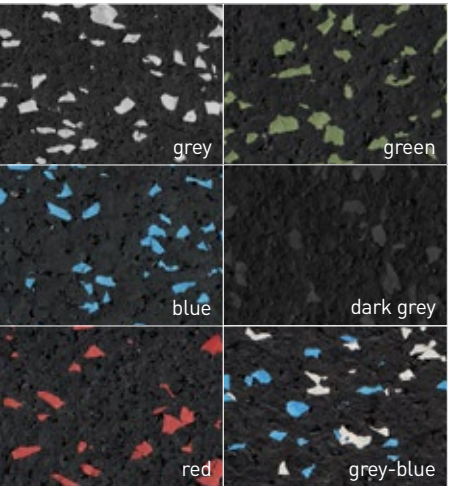


»SPORTEC® neon

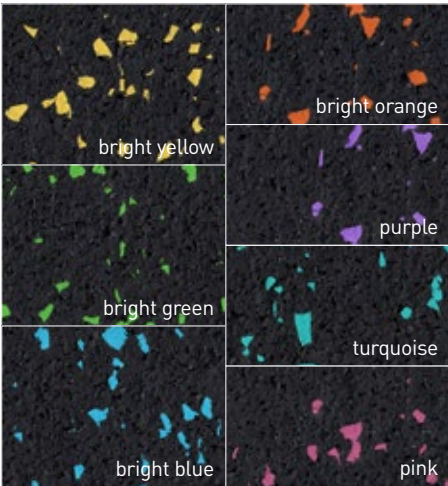


»SPORTEC® giga

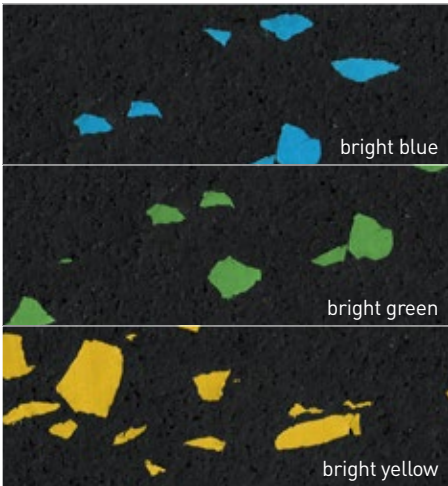


»SPORTEC® UNI classic

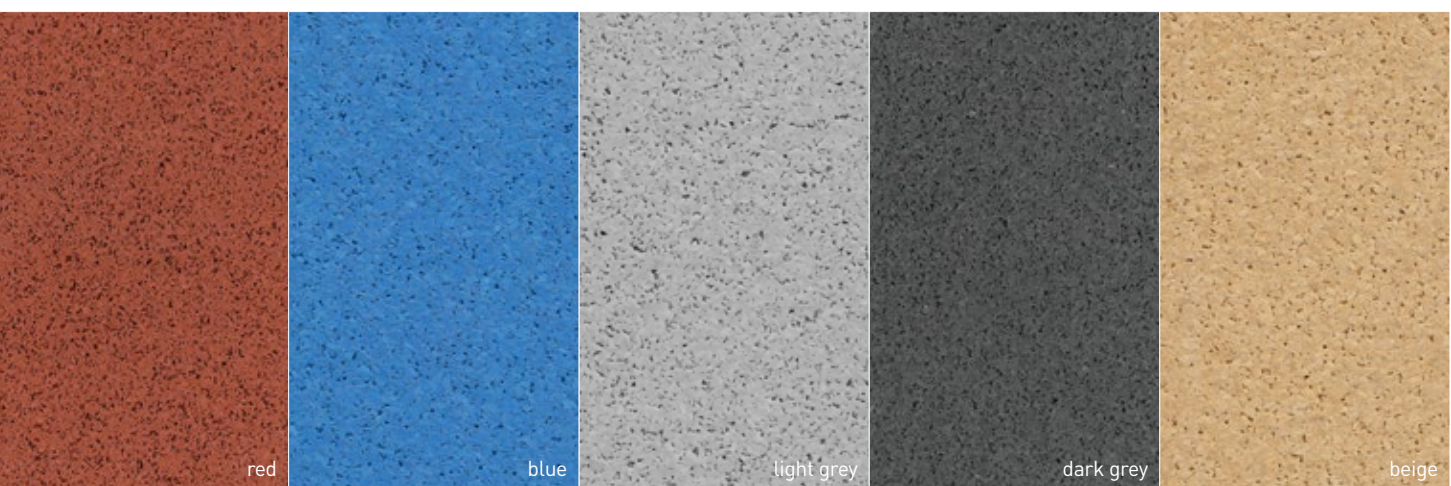

»SPORTEC® variant

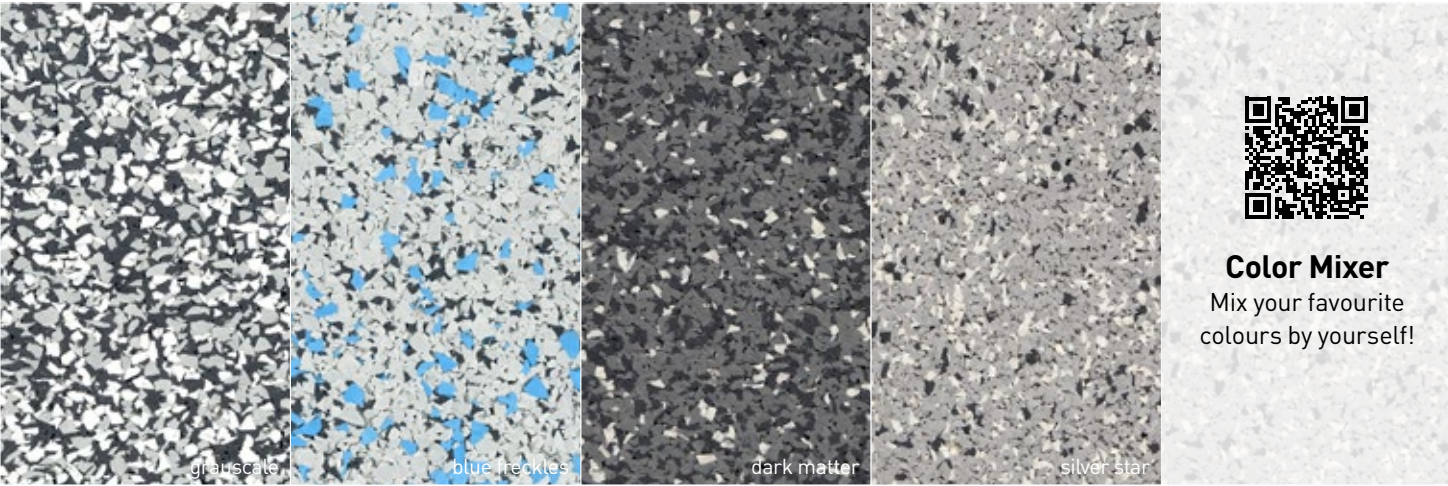

»SPORTEC® UNI versa

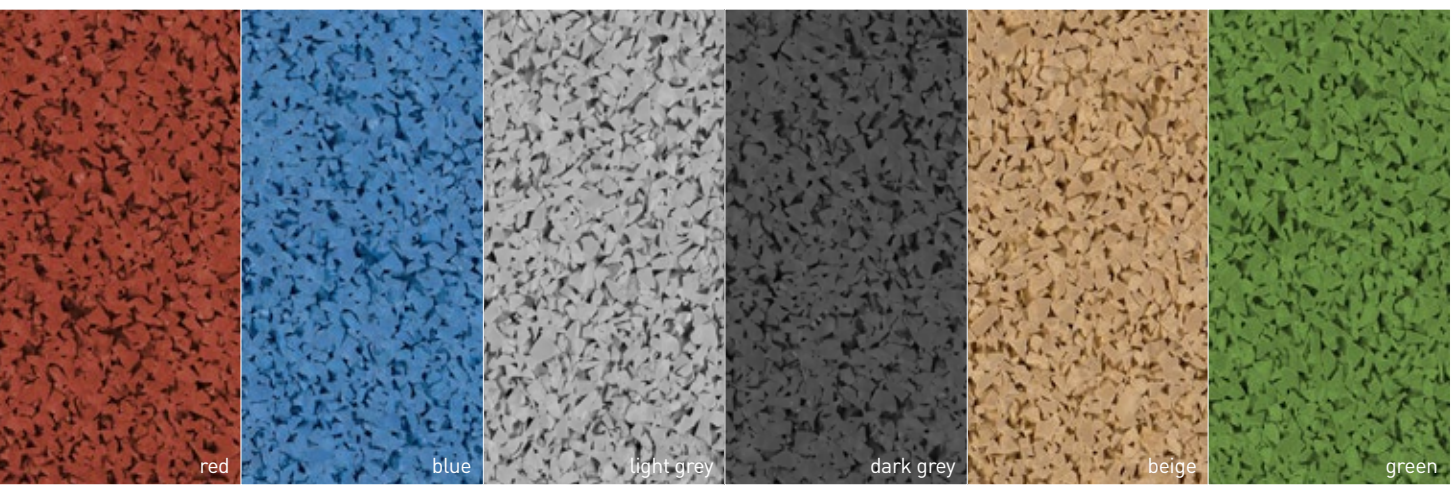


»SKI LIFTS



WEATHERPROOF. **COMFORT.**
ROBUST.

For safe and easy access to the pistes.

Winter sports are becoming increasingly popular and the areas around ski lifts, which are often wet to icy, are highly frequented and require special attention. SPORTEC® floor coverings cut a fine figure on every ski lift. The elastic floor covering protects ski boots from heavy wear and tear and ensures pleasant walking comfort. High slip resistance ensures a secure footing, even in light ice and snow. SPORTEC® mountain tiles are easy to install, even directly onto metal grating, with plug-in connectors offering long term stability.

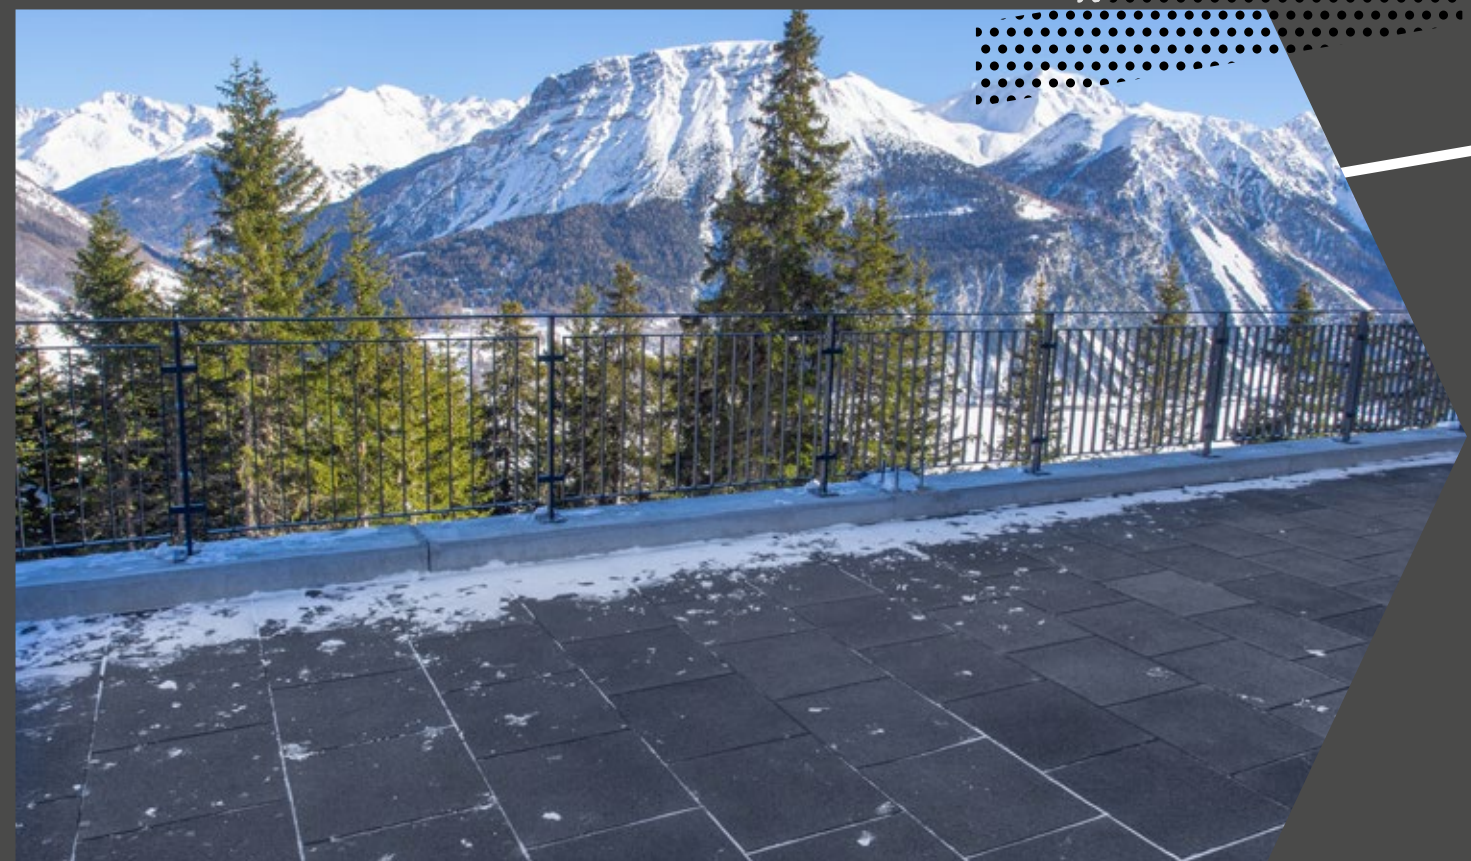



» RESORTS




VERSATILE. DESIGN OPTIONS.
PERMANENTLY ELASTIC.

For all indoor areas walked on with ski boots.

SPORTEC® floor coverings are suitable for reception areas, ticket booths, corridors and walkways that are walked on with ski boots. The high slip resistance, durability and walking comfort due to floors elasticity are particularly helpful. SPORTEC® roll material can also be easily cut to size which is ideal for stairways areas.



» ICE RINKS

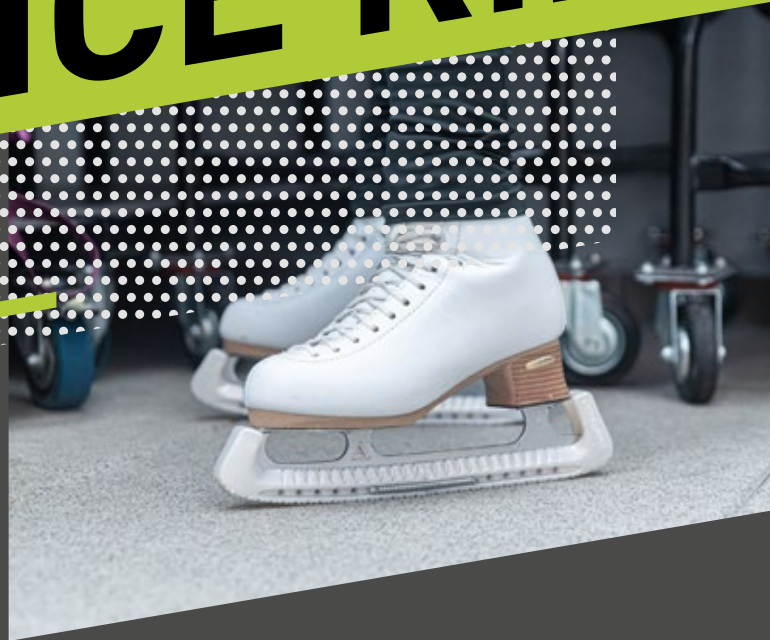

NON-SLIP. SOUND REDUCTION.
SCRATCH-RESISTANT.

So that you actually only slide on the ice.

While you want to glide and slide carefree with your skates on the ice rink, the exact opposite is desired from the surrounding areas. SPORTEC® floor coverings are extremely slip-resistant and therefore offer optimum protection for walkways or changing rooms in ice stadiums. Even sharp-edged blades cannot harm the resistant floor and positive acoustic properties help reduce the noise level in the halls creating a fun and comfortable environment.





» RETAIL




PROTECTION. ERGONOMIC.
DESIGN OPTIONS.

For ski shops and ski catering.

Floors in ski shops and catering establishments must be extremely resistant to avoid damage that could be caused when trying on or walking with ski boots. SPORTEC® floor coverings are robust and elastic at the same time, which makes them pleasant to walk on and protects the ski equipment. Slip resistance and impact sound reduction are additional benefits. Thanks to the numerous different products and colours, SPORTEC® flooring can be perfectly adapted to the corporate design of the shop or ski area.



»SKI DEPOTS

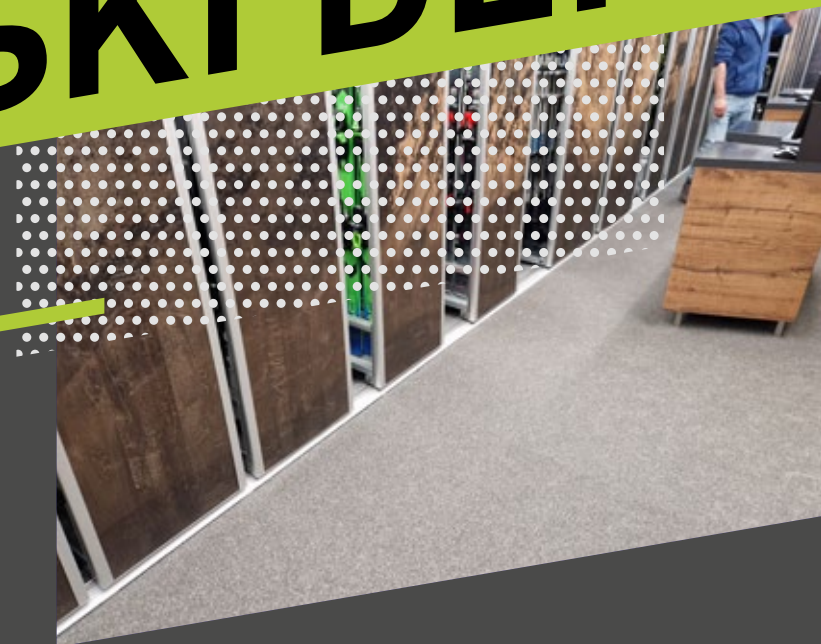

SAFETY. PRACTICAL.
WATER RESISTANT.

For dry boots the next day.

Thanks to ski depots, equipment can be stored safely and there is no need to carry it home every day. SPORTEC@floors are a practical solution for this area, offering high slip resistance and comfort whilst keeping you and your equipment safe after a long day on the piste.



INSTALLATION » ACCESSORIES



GLUEING. SEALING.
CLEANING. LINE PAINT.

SPORTEC® varnish. cleaner. adhesive. line paint.

We provide the necessary installation accessories for our SPORTEC® floor coverings. The varnish protects the floor and enables easier cleaning. With our cleaner you can remove even the most stubborn dirt from the floor. Our PU glue provides the strength and elasticity to make sure our floors are permanently fixed to the sub-base. You can use the line colour to fully customise the design and look of your floor.

» SPORTEC® Varnish RZ TURBO PROTECT ZERO



Packsize	4.5 l + 495 ml hardener
Pot life	120 Min. (20 °C / 60 % relat. LF)
Set to foot traffic	after approx. overnight drying
Final strength	after approx. 7 days
Consumption amount	100 ml/m ²


based on a room temperature of 20 °C



» SPORTEC® Cleaner RZ INTENSIVE CLEANER



Packsize	750 ml or 5 l
Working temperature	18 - 25 °C
Area	10 l: 250 m ²
Consumption amount	40 ml/m ²

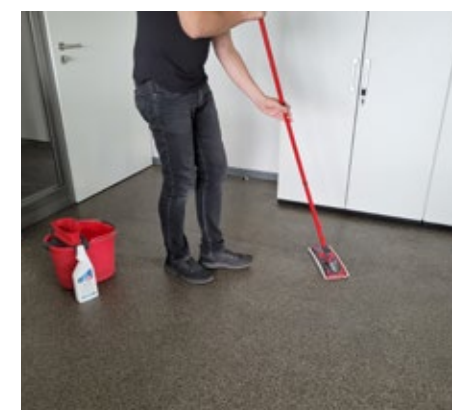

» Adhesive SPORTEC® UN 700



Packaging	Set of 10, 25 or 28 kg (mixing ratio Base : Curing Agent = 850 : 150)
Pot life	approx. 30-60 minutes
Can be walked on	after approx. 8 hours
Final strength	after approx. 36 hours
Consumption amount	700 g/m ²


based on a room temperature of 20 °C



» Line Marking Paint GLP MW



Colours	white, blue, black, dark blue, orange, yellow, red, grey, green
Packaging	1kg per set
Consumption	approx. 20 g/m ²
Recoatable	after 16 hours and max. within 48 hours at 20 °C and 50% RH
Fully cured	after approx. 7 days

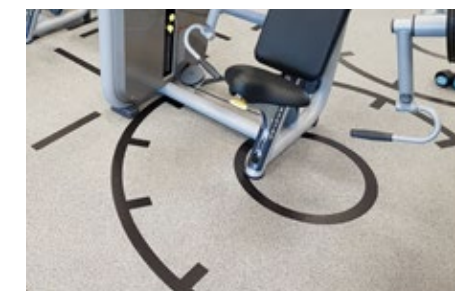

Technical Data

SPORTEC® mountain



Material	Polyurethane-bonded recycling tyre rubber granules and a reinforcing mash at the bottom, and a surface made of EPDM granules bonded with polyurethane
Dimensions	500 x 500 x 30 mm
Temperature range	-30°C to 80°C
Installation	loose laid with connector pins on metal grating

SPORTEC® UNI classic



Material	fine-grain EPDM granules, PU-elastomer bonded
Dimensions	Roll width: 1,250 mm Roll length: 15 m
Thicknesses	4 mm (other thicknesses available on request)

SPORTEC® UNI versa




Material	Coarse-grained coloured EPDM granules bonded with polyurethane elastomer
Dimensions	Roll width: 1,250 mm Roll length: 4 mm (other roll lengths available on request)
Thicknesses	4 mm (other thicknesses available on request)

More technical data:

visit www.kraiburg-relastec.com/sportec/en

SPORTEC® color



Material	fine-grain recycled rubber tyre granules (black) with 0 or 15 % EPDM colour granules, PU-elastomer bonded
Dimensions	Roll width: 1,500 mm Roll length Length m/Thickness mm: 30/4, 20/6, 15/8, 12/10
Thicknesses	4, 6, 8, 10 mm (other thicknesses available on request)

SPORTEC® neon / giga




Material	fine-grain recycled rubber tyre granules (black) with small (neon) or big (giga) EPDM colour granules, PU-elastomer bonded
Dimensions	Roll width: 1,500 mm Roll length Length m/Thickness mm: 30/4, 20/6, 15/8 (neon) 20/6, 15/8, 12/10 (giga)
Thicknesses	neon: 4, 6, 8 mm (other thicknesses available on request) giga: 6, 8, 10 mm (other thicknesses available on request)

EPDM colour range




SPORTEC® purcolor



Material	100 % EPDM granules PU-elastomer bonded
Dimensions	Roll width: 1,250 mm Roll length Length m/Thickness mm: 30/4, 20/6, 15/8
Thicknesses	4, 6, 8 mm (other thicknesses available on request)

SPORTEC® variant



Material	EPDM colour combinations, PU-elastomer bonded
Dimensions	Roll width: 1,250 mm Roll length Length m/Thickness mm: 30/4, 20/6
Thicknesses	4 or 6 mm (other thicknesses available on request)



General installation instructions


Required tools

gloves, measuring tape, cutter, chalk line, jigsaw and rubber hammer for tiles, pressure roller for rolls



Acclimatisation

The floor covering should be unstacked from the pallet before laying and stored 1-2 days where it will be laid.

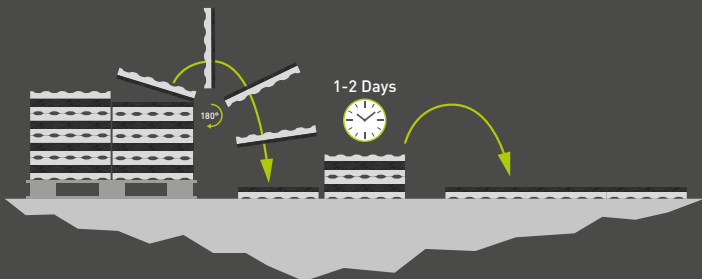

Adhesive (700 g/m²), varnish (100 ml/m²), cleaner (40 ml/m²)
Please add the required quantity to your order.

Detailed installation instructions for each product


www.kraiburg-relastec.com/sportec/en/downloads

Installation videos on YouTube




Installation of rolls

SPORTEC® rolls should always be aligned in the same direction towards the brightest part of the room.

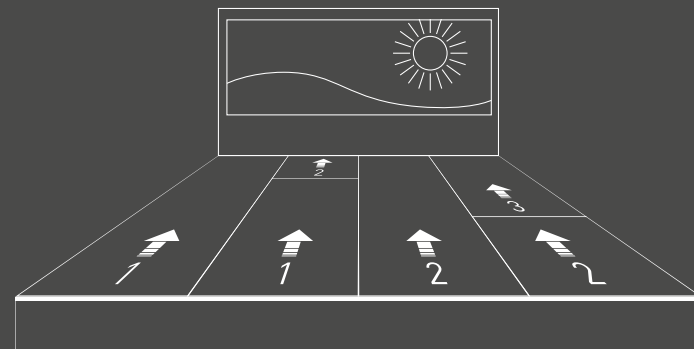

SPORTEC® rolls should be laid with pressure on the butted joints (close to overlapping). No welding or joint filler is required.

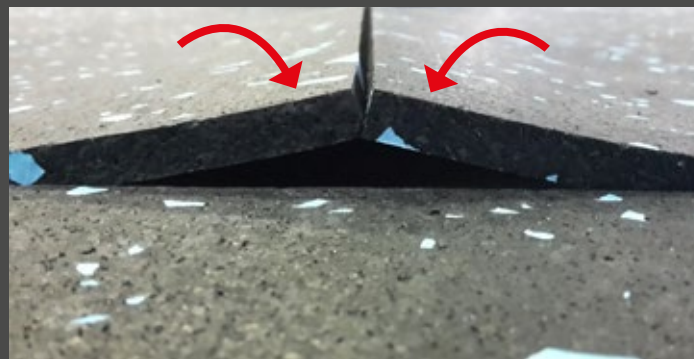

SPORTEC® rolls should be completely glued to the floor. Thicker rolls (from 10 mm thickness) can be fixed with industrial double-sided adhesive tape.



SPORTEC® website - tools



www.kraiburg-relastec.com/sportec/en/room-designer

Plan your room with the colour of your choice!
Select the photo that best suits your application and change the colours of the SPORTEC® product in the picture.

Other SPORTEC® brochures



Fitness



Gymcoustic



Sports Flooring



E-Layers



Commercial



Shooting




SUSTAINABILITY

Corporate Carbon Footprint, Product Carbon Footprint, Energy Management, Social and economic sustainability at KRAIBURG Relastec



Recycling of up to 60,000 t material

Every year, we process and recycle up to 60,000 tons of old tyres, closed-cell rubber and rubber production scrap.



Reduction of CO₂ emissions

By using recycled rubber granulate, we save more than 130,000 tonnes of CO₂ emissions per year compared to virgin rubber.



Corporate Carbon Footprint

The CCF was developed in accordance with the Greenhouse Gas Protocol audited.



Product Carbon Footprint

The PCF is calculated in accordance with ISO 14067 and ISO 14040/44 audited.



Energy management according to ISO 50001

Our energy management system is identified according to ISO 50001. Energy-relevant topics are taken into account in all processes of the organisation.

ecovadis

Voluntary rating

The ecovadis rating is an evaluation of companies with regard to CSR topics. This includes ethical aspects, sustainable procurement, the environment and ecological sustainability.



Member of NEW LIFE initiative

The declared aim of NEW LIFE is to demonstrate the advantages of recycled products from End-of-Life Tyres (ELT) to the media, politicians and the general public and to motivate them to act sustainably. More information: www.initiative-new-life.de/en



Social sustainability

Acting in accordance with our values such as equal opportunities, social responsibility, respectful treatment and transparency are the foundations for social sustainability in practice.



Economic sustainability

As a family business, KRAIBURG Holding pursues a long-term strategy. Profits generated are used to a significant extent to make our holistic business model ever more efficient and future-proof.



CORPORATE CULTURE

Defined values, social norms and guidelines, for common action and cooperation inside and outside KRAIBURG Relastec.



Equal opportunities

We stand for equal opportunity, diversity, inclusion and religious diversity.



Social responsibility

Fair pay, collective bargaining, further training, career development, work-life integration.



Respect

We are honest, reliable, respectful and trustworthy towards our colleagues and partners.



Strong decision-making powers

We ensure speed in process handling, faster technology optimisations and lean processes.



Responsible for our actions

We take responsibility for all decisions and results. Error acceptance is firmly anchored in our culture.



Transparency

We practice open, transparent cooperation both inside and outside the company.



WHAT SETS US APART



Internationality

With an export quota of over 50%, we have already exported our products to over 100 countries.



Easy complaint management

Transparent and optimised processes ensure rapid processing.



Flexibility with customer requirements

We offer our partners customised options for packaging, labelling and delivery, packaging, labelling and delivery.



Long-term relationships

We maintain long-term relationships with our customers and suppliers based on mutual respect and fairness.



Marketing support

We provide you with the best possible support in the form of images or in the design of your documents.



Personal contact persons

We do not hide behind support hotlines and contact forms. With us, you have personal, competent contact persons.



Product quality

Our products meet the highest quality standards. They are durable, a perfect fit and made from high-quality raw materials.



Innovation and product design

We continuously develop new products according to the requirements of our customers and the market.

» **MORE FROM YOUR FLOOR**




Sports flooring and elastic layers
made from rubber granules

KRAIBURG Relastec GmbH & Co.KG
Fuchsberger Straße 4 · D-29410 Salzwedel

Sales International:
Tel. +49 (0) 8683 701 -340
Fax +49 (0) 8683 701 -4340
sportec@kraiburg-relastec.com
www.sportec-flooring.com

No liability accepted for errors or omissions. Subject to changes without prior notice.
© KRAIBURG Relastec GmbH & Co. KG 2024



Download the latest version
of this brochure as PDF.